

MARIUS AURENTI



INTENSIVE LACQUER – MATTE



$\approx 17 \text{ m}^2/\text{L}/\text{coat}$
($\approx 693 \text{ sq ft}/\text{gal}/\text{coat}$)




Application tools:

100% synthetic brush;
10 mm microfiber roller;
4 mm lacquer roller.
Maximum dilution: 5%.



5 hours

Classification: AFNOR NFT T 36-005
Famille I Classe 7b2-4a
VOC max: 76 g/L

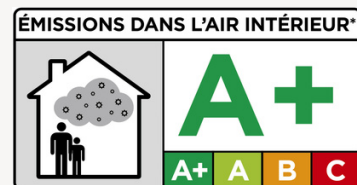

Marius Aurenti Intensive Lacquer is an interior matte lacquer designed for surfaces subjected to the most demanding use and cleaning conditions. It is particularly suitable for high-traffic areas, public-access establishments (ERP), or any surface requiring exceptional wet-scrub resistance.


Its formulation combines aqueous acrylic and polyurethane resins, offering a high dry extract and exceptional mechanical performance, rated Class 1 for wet-scrub resistance. It can be applied to properly prepared, sound, well-adhered existing paint or substrates primed with Marius Aurenti Truly Universal Primer, but also to properly prepared interior wood or metal.

Its deep matte appearance allows for an elegant decorative finish while maintaining high technical performance.

The average coverage is approximately 17 m²/L/coat (693 sq ft/gal/coat), with a recoating time of 5 hours. Apply two coats using a synthetic brush or a 4 mm lacquer roller. This paint can also be used to refinish existing or new furniture, thanks to its durability and refined decorative finish. It can be diluted with up to 5% water for application.

Classified as category A, it has a VOC content of 76 g/L, below the regulatory limit of 130 g/L for this category.

234 SHADES

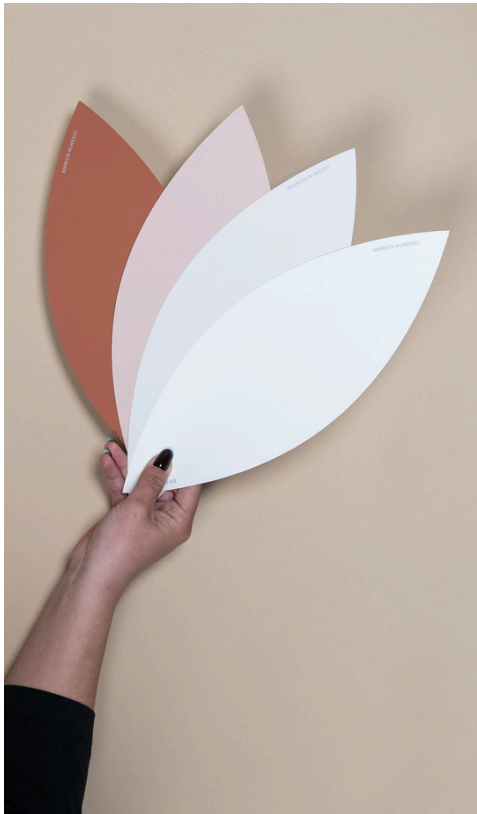

Marius Aurenti intensive matte lacquer is a matte interior lacquer designed for surfaces subjected to the most demanding use and cleaning conditions.

It is particularly suitable for high-traffic areas and public-access establishments (ERP) or any surfaces requiring exceptional wet-scrub resistance.

Its formulation combines aqueous acrylic and polyurethane resins, offering a high dry extract and exceptional mechanical resistance, classified as class 1 for wet abrasion.

Its matte appearance allows for an elegant decorative finish while maintaining high technical performance.

APPLICATIONS

Decorative lacquer for the protection and finishing of interior surfaces.

Suitable for surfaces in high-traffic public-access establishments, including restaurants, retail stores, hotels, and entrance halls.

COMPOSITION

Water-based polyurethane-modified acrylic paint

PROPERTIES

Excellent leveling, highly resistant to scratches, impacts, and stains, and easy to clean.

COLORS

234 shades from the IRIS color chart; custom color matching available upon request

FINISHES


Matte

PACKAGING

1 L, 2.5 L, and 10 L

CLASSIFICATION

AFNOR NF T 36-005 Famille I Classe 7b2-4a

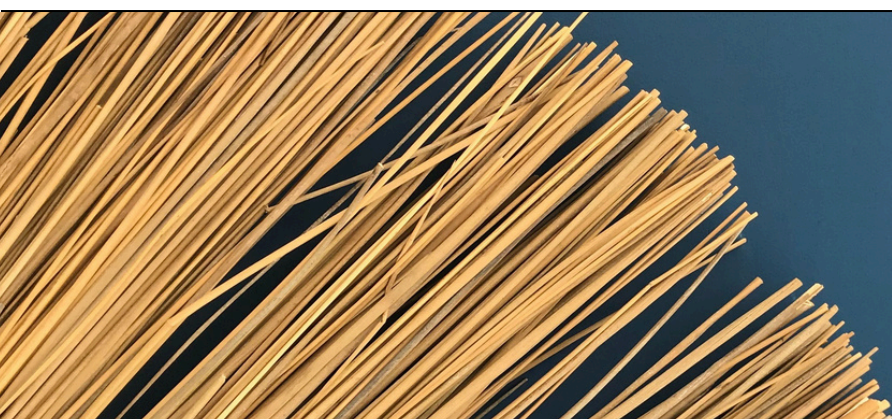

SUBSTRATE AND SUBSTRATE PREPARATION

Suitable substrates: Plaster, cement, woodwork, metals, compatible old paints.
The substrate must be sound, dry, clean, and prepared with Truly Universal Primer.

Substrates must comply with applicable trade practices and current French DTU 59.1 standards and must be clean, sound, dry, and cohesive.

PRODUCT PREPARATION

Ready to use.
For spray application, dilute with up to 5% water.

APPLICATION TOOLS

100% synthetic brush, 10 mm microfiber roller, or 4 mm lacquer roller.
Airless sprayer: 515 low-pressure tip at 150–170 bar (2,175–2,466 psi)

APPLICATION CONDITIONS

Ventilate the room during application and drying to avoid any surface defects in the paint film.

TEMPERATURE	Above 10°C (50°F) and below 25°C (77°F)
RELATIVE HUMIDITY	< 65%

IMPLEMENTATION

Mix thoroughly before application. Apply two cross-coats without overworking the paint.

COVERAGE

Approximately 17 m²/L/coat (693 sq ft/gal/coat)

DRYING TIME AT 20°C (68°F) AND 60% RELATIVE HUMIDITY

DRY TO THE TOUCH	2 hours
RECOAT TIME	5 hours

TOOL CLEANING

Clean application tools with water after use.

PRODUCT APPEARANCE

Colored liquid

APPEARANCE AFTER APPLICATION AND DRYING

Smooth, matte paint film

DENSITY (AT 20°C)

1.3

DRY SOLIDS

≈ 54% (by weight)

SPECULAR GLOSS

< 5% at 60° and < 16% at 85°

WET-SCRUB RESISTANCE ACCORDING TO NF EN ISO 11998

Class 1 for both the base and tinted colors

Class 1 = Excellent washability (highest class)

Thickness loss $\leq 5 \mu\text{m}$ after 200 wet-scrub cycles

VOC

This product contains a maximum of 76 g/L VOC in its ready-to-use form.

EU VOC limit value (subcategory d): 130 g/L



STORAGE AND SAFETY

1 year in its original unopened packaging, protected from sunlight and frost, at temperatures between 5°C and 35°C (41°F and 95°F).

Respect the best before date shown on the packaging.

For further safety information, refer to the Safety Data Sheet.

MARIUS AURENTI

For 40 years, Marius Aurenti has been innovating to improve the performance of decorative materials and the sensations they provide.

A mineral and plant aesthetic, close to Nature, to which our works pay homage and for which our environmental commitment is total.

Marius Aurenti is also present, through its training and support, alongside quality French craftsmanship which, every day in our workshops as well as in the field, strives to make each place unique, beautiful and timeless.



www.mariusaurenti.com +33 (0)9 87 87 65 75