

MARIUS AURENTI



TECHNICAL DATA SHEET
Edition of 17/07/26

ORIGINE VÉGÉTALE® PRIMER (PLANT-BASED)



≈ 11 m²/L/coat
(≈ 448 sq ft/gal/coat)




Application tools:

12 mm microfiber roller;
12 mm nap or 12/14 mm textured
polyamide roller.
Maximum dilution: 5%.



6 hours

Classification: AFNOR NFT T 36-005:
Family I, Class 4a
VOC max: 1 g/L



PROPERTIES

Easy to apply, it provides excellent hiding power and high-build performance while effectively regulating substrate porosity.

Formulated with a resin containing 98% biobased carbon, as determined in accordance with NF EN 16640.

COMPOSITION


Water-based alkyd resin made with biobased carbon.

PACKAGING

2.5 L and 10 L

AREAS OF USE

Origine Végétale® Primer is designed to prime substrates before applying a matte finish.

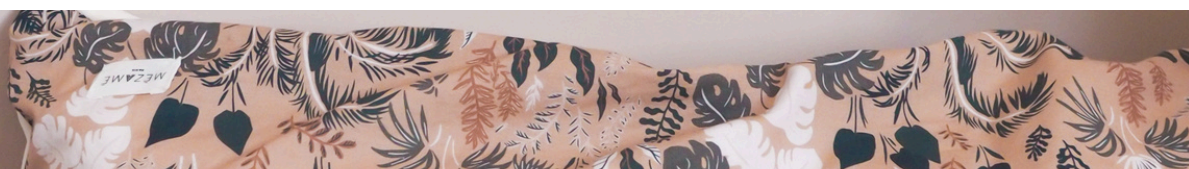

SUBSTRATES AND SUBSTRATE PREPARATION

Suitable substrates: plasterboard, concrete, and sound, well-adhered existing paint

On new substrates, lightly abrade and remove all dust before application.
Allow new concrete or cement substrates to cure for 45 days and verify that the pH is below 9 before application.

Clean previously painted substrates as required, rinse, allow them to dry, and then abrade before application.

Substrates must be clean, sound, dry, cohesive, and compliant with current French DTU 59.1 standards before painting.

APPLICATION EQUIPMENT

Mixed-bristle brush; 12 mm microfiber roller; 12/14 mm textured polyamide roller. Spray application: dilute with up to 5% water. Airless sprayer: 515 or 517 tip.

APPLICATION CONDITIONS

TEMPERATURE	Above 8°C (46°F) and below 35°C (95°F); ideal temperature: above 15°C (59°F) and below 20°C (68°F)
RELATIVE HUMIDITY	Below 70% in dry weather
Before application, verify that the substrate moisture content does not exceed 5%.	

APPLICATION METHOD

MIX THOROUGHLY BEFORE USE.

APPLY ONE COAT OF WHITE ORIGINE VÉGÉTALE® PRIMER, FOLLOWED BY TWO COATS OF WHITE OR TINTED PLANT-BASED MATTE VELVET PAINT.

COVERAGE

Approximately 11 m²/L/coat (448 sq ft/gal/coat)

DRYING TIME AT 20°C (68°F) AND 60% RELATIVE HUMIDITY

TOUCH DRY	1 hour
BETWEEN THE LAYERS	6 hours

TOOL CLEANING

Clean application tools with water immediately after use.

DENSITY AT 20°C (68°F)

Approximately 1.5

SPECULAR GLOSS

<2.5 GU at 60°

SOLIDS CONTENT

59% by weight

PRECAUTION FOR USE

Protect from frost

VOC

This product contains less than 1 g/L VOC in its ready-to-use form.

French indoor air quality rating: A+;

EU VOC category: A/g

STORAGE AND SAFETY

1 year in its original unopened packaging, protected from sunlight and frost, at temperatures between 5°C and 35°C (41°F and 95°F).

FOR ADDITIONAL SAFETY INFORMATION, REFER TO THE SAFETY DATA SHEET.



MARIUS AURENTI

For 40 years, Marius Aurenti has been innovating to improve the performance of decorative materials and the sensations they provide.

A mineral and plant aesthetic, close to Nature, to which our works pay homage and for which our environmental commitment is total.

MA's is also present, through its training and support, alongside quality French craftsmanship which, every day in our workshops as well as in the field, strives to make each place unique, beautiful and timeless.



www.mariusaurenti.com +33 (0)9 87 87 65 75